Verbatim LED Downlight 135mm 15W 4000K 880lm

Product Number	52425
General Data	
Housing material	Aluminium, Polycarbonate Cover
Housing colour	White
Protection class	IP20
Geometric Data	
Length (mm)	53
Outer diameter (mm)	135
Inner diameter (mm)	125
Weight (g)	286
Electric Data	
Wattage (W)	15
Voltage (V)	220-240
Power Factor	0.90
Operating Frequency (Hz)	50-60
Safety Class	Class III
Power supply	external
Photometric Data	
Luminous Flux (lm)	880
CRI	80
CCT (K)	4000
Luminous Efficacy (lm/W)	58.67
Luminous Intensity (cd)	600
Beam Angle (°)	90
Lifespan	
Lifetime (hrs)	30,000
Switching Cycle	20,000
Dimmable	no

22/10/2014

Lifestyle image

Technical Drawings

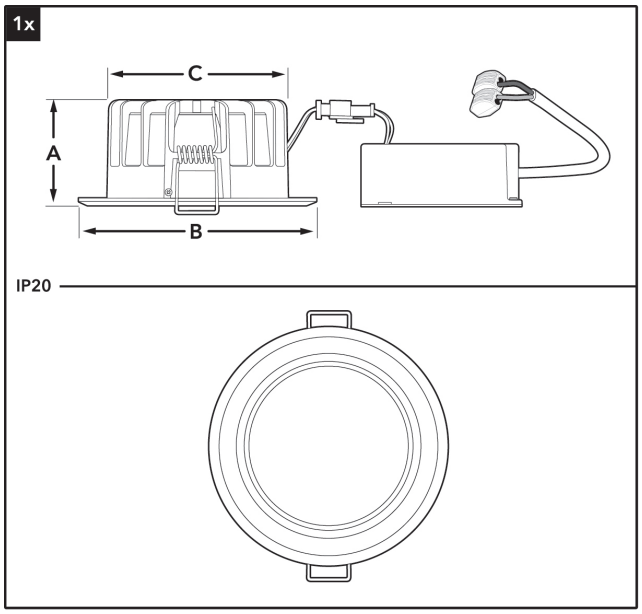

A	53mm
B	135mm
C*	125mm

*cut out diameter

22/10/2014

Photometric Diagrams

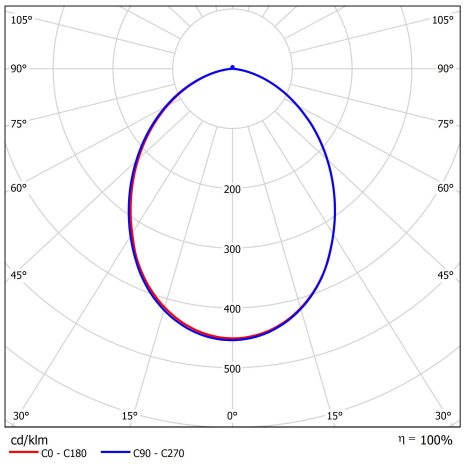

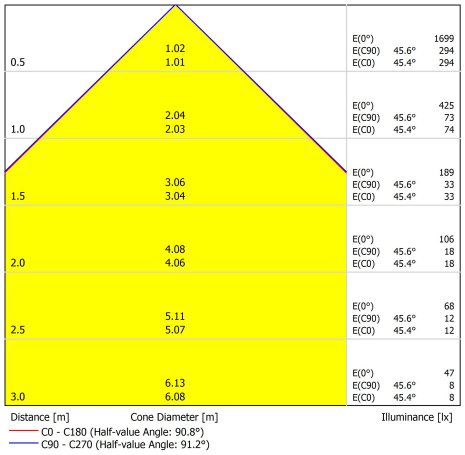

22/10/2014

Energy Rating

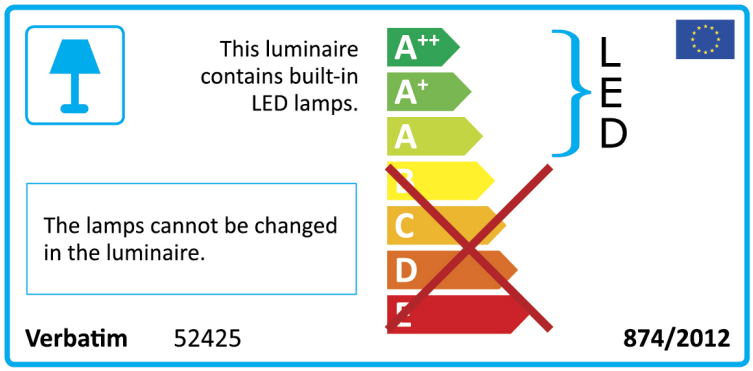

Technical Packaging Details

Barcode
023942524250

EAN 128
(02)00023942524250(37)04(91)204

EAN 14
50023942524255

Pack Dimensions(HxWxL)
104 x 140 x 140 (mm)

MOQ
4

Carton Dimensions (HxWxL)
223 x 148 x 295 (mm)

Cartons/Pallet
68

Layers/Pallet
4

Units/Pallet
272

22/10/2014